


PURSUIT SLING

STOP Firearm safety is your individual responsibility. Failure to follow reasonable safety rules could result in an accidental discharge of your firearm, causing injury and/or death to yourself and/or someone else. You must carefully examine and be sure the firearm is unloaded. You must visually inspect the chamber and the magazine to make sure they are clear/empty. You must remove the cartridge clip, if present. These activities must be performed each time you install or remove your **PURSUIT SLING** with **TALON Sling Swivels**. This detailed information must be given to anyone using your **PURSUIT SLING** with **TALON Sling Swivels**.

! Make sure the **Chicago Screws** on the sling are tight and secure. Failure to do so could cause the firearm to fall, resulting in damage to the firearm and/or scope or even accidental discharge of the firearm. Discharge of the firearm could cause injury and/or death to you and/or others.

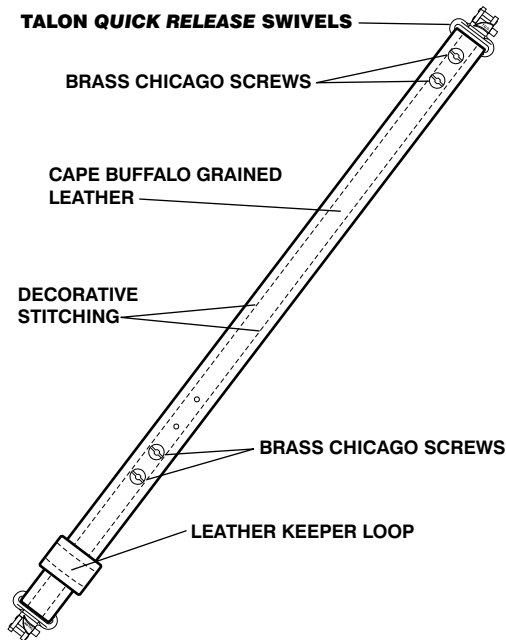

INSTALLATION:

- A.** Press the Spring-Loaded Pin inward to open the Rotating Gate, as pictured, **Fig. 1**.
- B.** Rotate Gate 90 degrees to open while pressing inward on the Spring-Loaded Pin, as pictured, **Fig. 1**.
- C.** Insert swivel Base/Stud Pin into provided swivel base/stud on your firearm.
- D.** To close the Rotating Gate, depress the Spring-Loaded Pin while rotating the Gate 90 degrees to the fully closed/engaged position, as pictured, **Fig. 2**.
- E.** The swivel Base/Stud Pin must pass completely through the hole at the end of the Rotating Gate, as pictured, **Fig. 2**.
- F.** The Rotating Gate must rest fully within the Off-Set in the swivel body, as pictured, **Fig. 2**.
- G.** **No Gap or Open Space** will be present in this area when the swivel is fully closed/engaged correctly, as pictured, **Fig. 2**.

Removal of the TALON Sling Swivels is accomplished by reversing the steps "A" through "G".





Fig. 2 Fully Closed/Engaged Position

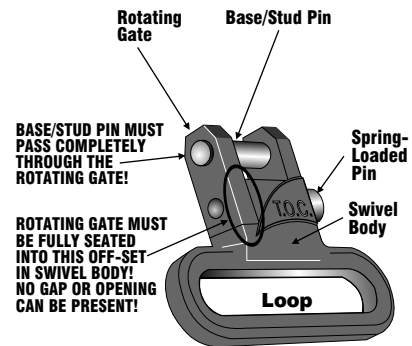

INFORMATION:

- 1.** The swivels must be observed each time you use your firearm to ensure they are fully closed/engaged.
- 2.** Pulling, tugging or stress of any kind upon the swivels, sling or firearm must be given immediate attention to make sure the swivels remain in the engaged position during usage.
- 3.** You must never attempt to climb trees, tree stands, steep inclines, hills, rocks or jump over ditches with a loaded firearm. You must never ride/drive an ATV, horse or any motor vehicle with a loaded firearm. The act of firearm and hunting safety is your responsibility.
- 4.** It is necessary for you to convey this information, in detail, to anyone who may use your **TALON Sling Swivels**. Failure to follow the safety rules and recommendations set forth in this pamphlet could result in a swivel accidentally opening and becoming detached from the swivel base/stud. If this should occur, the firearm could fall and could result in damage to the firearm, accidental discharge, and/or cause injury and/or death to yourself and/or someone else.

! CAUTION ! CAUTION ! CAUTION !

! The **TALON Sling Swivel** must not be overloaded or improperly stressed. Correct installation of the **TALON Sling Swivel** requires: 1. The Base/Stud Pin to pass completely through the hole at the end of the Rotating Gate, **Fig. 2**. 2. The Rotating Gate must be positioned/seated into the Off-Set in the swivel body, in the closed/engaged position, **Fig. 2**.

i The **TALON Sling Swivel** is a well designed mechanical device. Only superior materials and the most advanced techniques are used in manufacturing. The surface and the Spring-Loaded Pin cavity should be lightly oiled to prevent corrosion and retain good appearance and working order, as designed.

This instructional information sheet should be retained for future reference.



7901 PANTHER WAY • WACO, TX • 76712-6556 • USA
254-772-5575 • FAX: 254-776-3553
SALES/SERVICE: 800-533-6076

www.OutdoorConnection.com