




# Valu\$ling

MORE for LESS



**Firearm safety is your individual responsibility.** You must carefully examine and be sure the firearm is unloaded. You must visually inspect the chamber and the magazine to make sure they are clear/empty. You must remove the cartridge clip, if present. These activities must be performed each time you install or remove The Valu\$ling Firearm Sling. This detailed information must be given to anyone using your Valu\$ling.

## GUARANTEED ∞ FOREVER

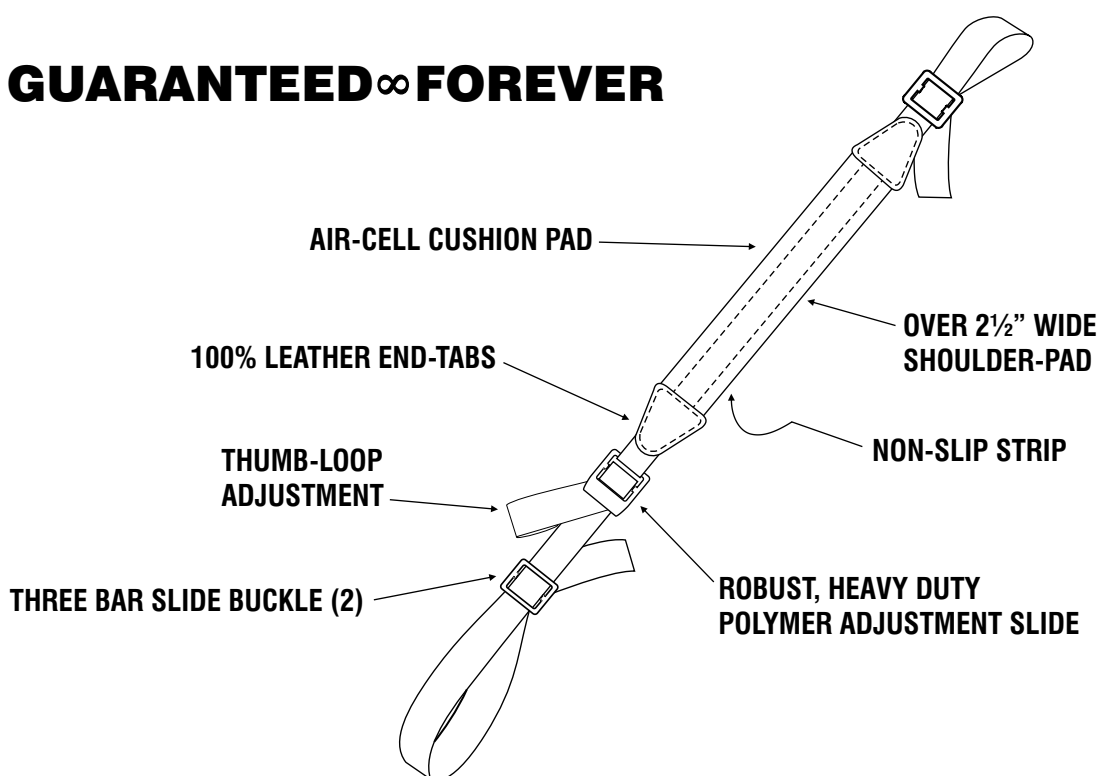

### INSTALLATION:

1. The end straps (webbing) of the Valu\$ling must encircle the barrel and the stock of the firearm twice. PICTORIALS 1&2
2. This will ensure the most positive gripping/holding of the firearm.
3. The webbing must lay flat on the barrel and stock. PICTORIALS 2&3
4. The webbing must not be twisted wherever it contacts the firearm (barrel or stock).
5. The three bar slide buckle must be drawn against the firearm barrel or stock and remain in that position at all times. PICTORIALS 2&3
6. A minimum of 3" of webbing material must extend beyond the three bar slide buckle when the Valu\$ling is properly installed. PICTORIALS 2&3
7. **DO NOT** use the Valu\$ling if the 3" of webbing material is not available/present.
8. **The Valu\$ling must be installed carefully and examined frequently to make sure the firearm is being carried safely.**

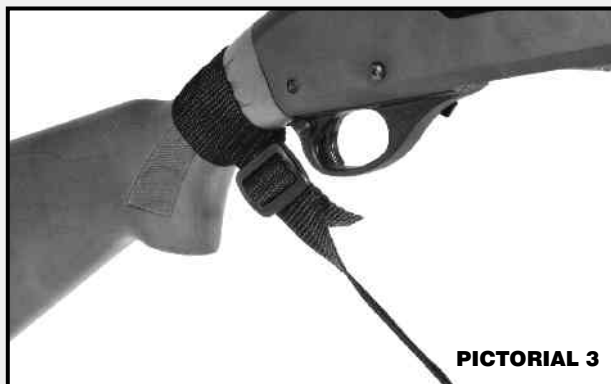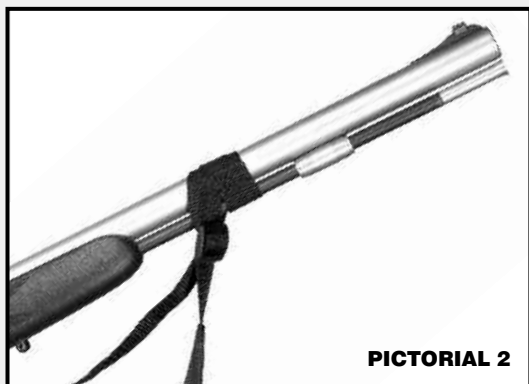


### The Outdoor Connection's Brute Sling Swivel is a Recommended Application...

**NOTICE:** Swivels not included with Sling. Swivels for Illustration Purpose only.

#### SWIVEL INSTALLATION:

1. Read carefully and follow closely these instructions closely.
2. Remove the end of the webbing from the three bar slide buckle. FIGURE 1
3. Leave the buckle on the webbing.
4. The webbing must remain over the top of the buckle. FIGURE 1
5. Feed/Lace the end of the webbing through a 1" swivel. FIGURE 1
6. **NOTICE:** The webbing end must enter the slide buckle from the underneath.
7. At least 3" of webbing end material must extend beyond the three bar slide buckle. FIGURE 2
8. Pull the end of the webbing to remove all slack. FIGURE 3
9. The remaining section of the webbing is pulled through into the slide buckle to remove all slack. FIGURE 4
10. The completed installation of the swivel will determine the length of the Valu\$ling. FIGURE 5

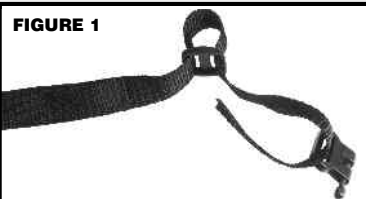

**This instructional information sheet should be retained for future reference.**



7901 Panther Way • Waco, TX • 76712-6556 • USA  
Phone: 254-772-5575 • Fax: 254-776-3553

800-533-6076

www.OutdoorConnection.com